

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

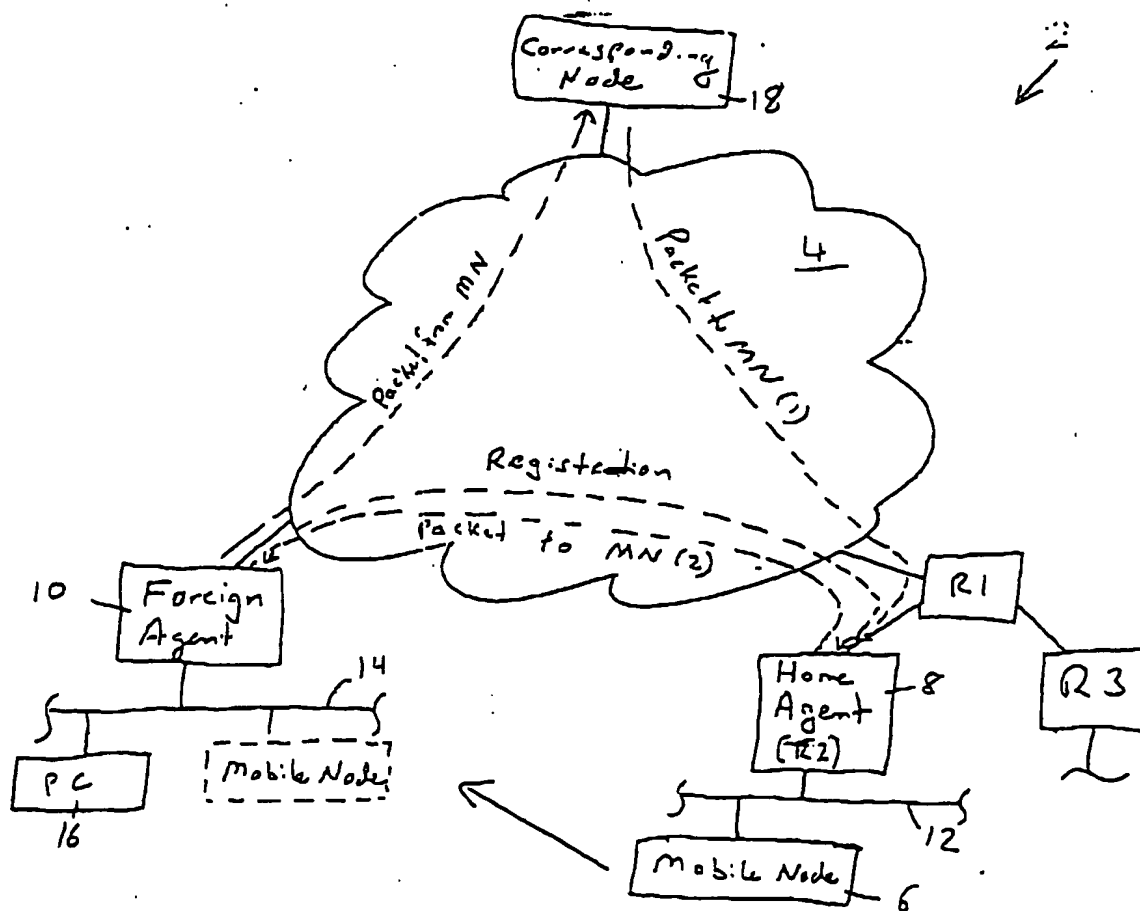


FIG. 1

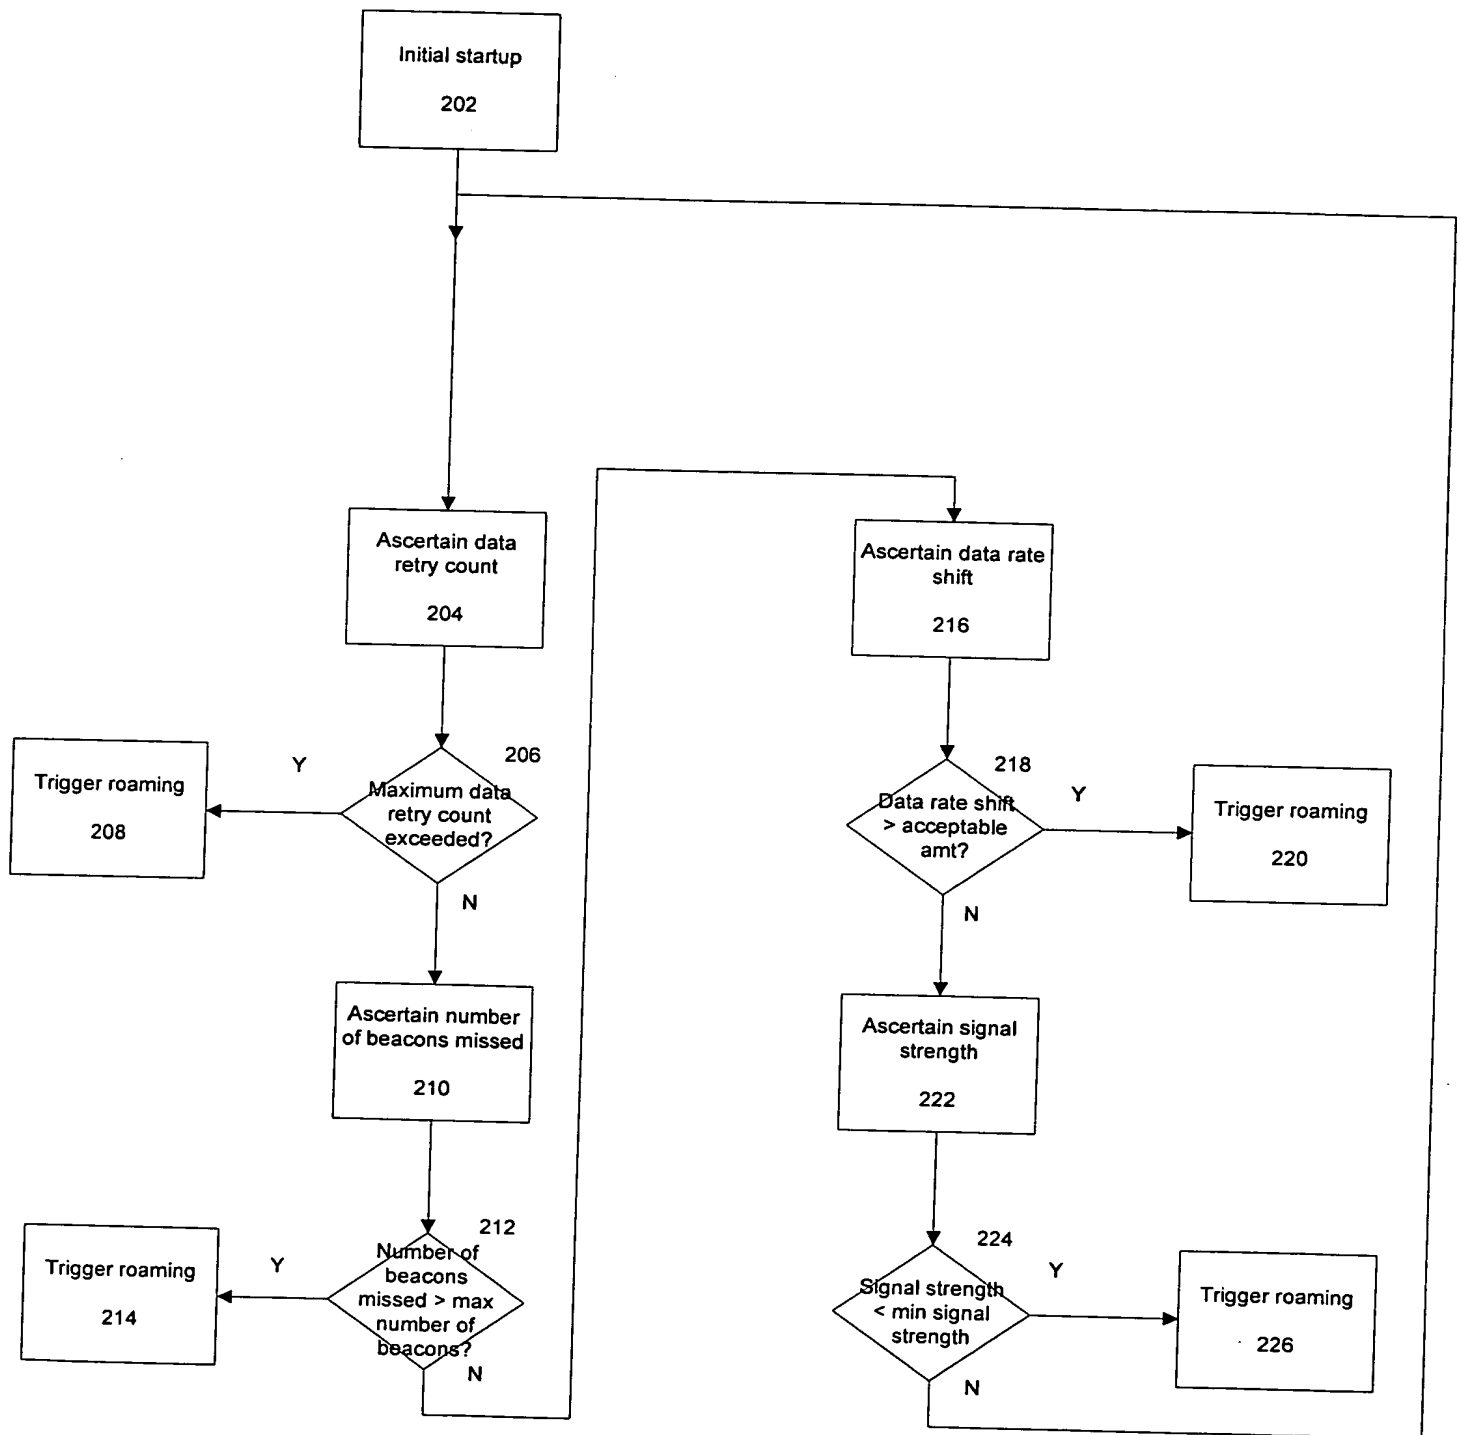


FIG. 2

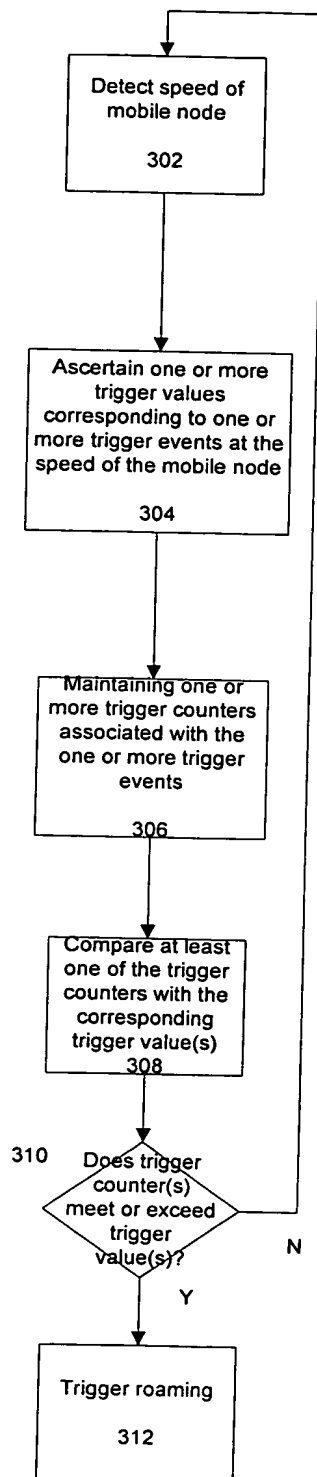


FIG. 3

Speed range	0-1 mph	1-3 mph	3-10 mph	10-30 mph
Max data retry count trigger value	12	8	4	1
Max missed beacons trigger value	4	3	2	1
Max data rate shift trigger value	30	15	7.5	3
Min signal strength trigger value	25	12.5	6.25	3.125

FIG. 4

Speed range	0-1 mph	1-3 mph	3-10 mph	10-30 mph
Max data retry count multiplication factor	1	$2/3$	$1/3$	$1/12$
Max missed beacons multiplication factor	1	$3/4$	$2/4$	$1/4$
Max data rate shift multiplication factor	1	$1/2$	$1/4$	$1/10$
Min signal strength multiplication factor	1	$1/2$	$1/4$	$1/8$

FIG. 5

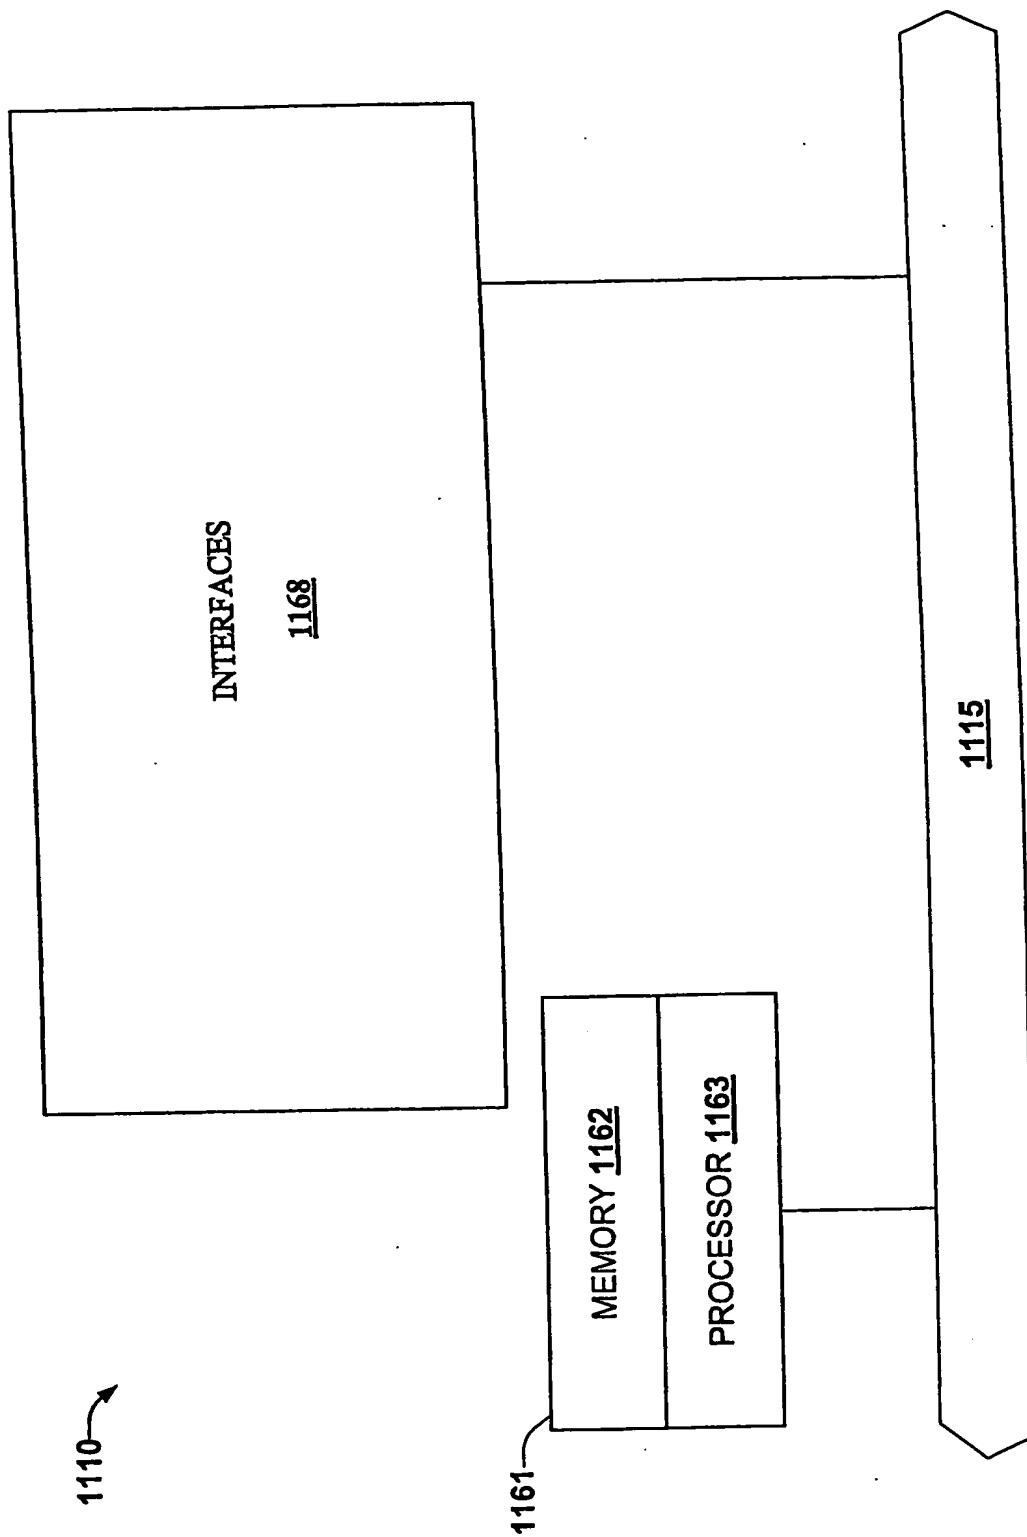


Figure 11